



FLO

SPECIFICATIONS:

Light Output: Colour Changing
 Power: 14.4 Watts/m (4.4 Watts/ft.)
 Voltage: 12V
 Light Colour: RGB
 Beam Angle: 120°
 Length: 16'-3" / 5m
 Width: 0-1/2" / 12mm
 Depth: 0-3/16" / 4mm
 Cuttable every 2" / 50mm
 Dimmable
 Waterproof IP67 (with sealed connections)
 50,000 Life Hours
 Requires colour controller (GLF-RGB-CONT)
 Included: 4 x Silicone End Caps per Roll


LIGHTING FACTS

COLOUR CHANGING RIBBON

ITEM NO.	GLF-RGB-12V
Light Output (Lumens)	n/a
Watts	14.4/m
Lumens per Watt (Efficacy)	n/a
Colour Accuracy	n/a
Colour Rendering Index (CRI)	
Light Colour	Colour Changing
	
14.4 Watt/m • Colour Changing	

ORDER WITH:

GLF-RGB-CONT

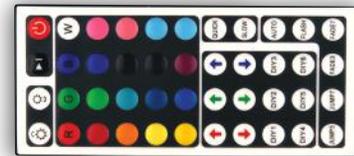

PRODUCT BENEFITS:

Colour changing ribbon is perfect for many applications including theatre steps, back lit tvs, patios, bedrooms, bars and anywhere else you want a glow of colour!

AVAILABLE ACCESSORIES:

12V Dimmable Drivers

25W • GLS-12025-TD
50W • GLS-12050-TD
100W • GLS-12100-TD
150W • GLS-12150-TD
200W • GLS-12200-TD

Quick Clip Feed

GLF-RGB-FEED

Quick Clip Flexible Joiner

GLF-RGB-FLEX

Aluminum Channels

Deep Recess • GLF-1201REC-1M
Deep Surface • GLF-1202SUR-1M
45° Angle • GLF-1203ANG-1M
Shallow Recess • GLF-1204RECS-1M
Shallow Surface • GLF-1205SURS-1M

Drywall Channel Lighting System**Chopstick Lighting System****COLOUR CONTROLLER:**

Colour Controller:

GLF-RGB-CONT

Colour controller is required to use colour changing capabilities of the LED ribbon. One controller per circuit up to 30 amps.

Amps: 30A

Input: 12V-24V

Included: IR Remote (44 key)

IR Controller