



INTEGRATED LED ELBOW
PART NUMBER: GL-12E4-3030



SPECIFICATIONS:

- Light Output: 1200 Lumens ± 10%
- Power: 12 Watts
- Efficacy (Lumens per Watt): 100 LM/W
- Colour Accuracy (CRI): 80+
- Light Colour: 3000K Warm White
- LED Chip Epistar
- Trim Size: 4" (Actual: 5"/127mm)
- Beam Angle: 30°
- Gimbal Angle: 85°
- Dimmable
- IC Rated
- Damp Location Rated
- 35,000 Life Hours
- Power Supply (Driver) Included

LIGHTING FACTS

**ELBOW
RECESS**

ITEM NO.	GL-12E4-3030
Light Output (Lumens)	1200
Watts	12
Lumens per Watt (Efficacy)	100
Colour Accuracy	80+
Colour Rendering Index (CRI)	
Light Colour	3000K Warm White
2700K 3000K 3500K 4000K 4500K 5000K 6000K	
12 Watt • Warm White	

PHOTOMETRICS:

MOUNTING HEIGHT (FT.)	CENTER BEAM FOOT CANDLES (FC)	EDGE BEAM FOOT CANDLES (FC)	BEAM AREA COVERED (FT.)
4 FT.	89.0 FC	55.0 FC	2'-2"
6 FT.	39.0 FC	28.0 FC	3'-3"
8 FT.	20.0 FC	13.0 FC	4'-3"
10 FT.	15.0 FC	9.0 FC	5'-4"
12 FT.	10.0 FC	5.0 FC	6'-5"
14 FT.	7.0 FC	3.0 FC	7'-6"
16 FT.	5.0 FC	1.0 FC	8'-7"




ORDERING INFORMATION:

1. Select Trim Colour:
GL-12E4-3030-

W - Matte White
B - Matte Black



PRODUCT DIMENSIONS:

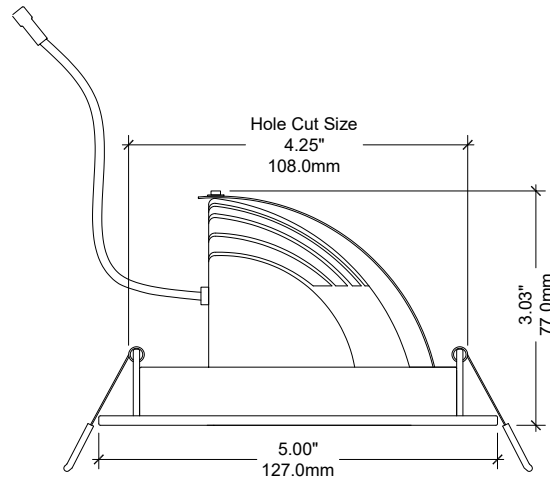

Power Supply (Driver) Size:
4"-1/2" x 2"-1/4" x 1"-1/2"
(113mm x 58mm x 37mm)

ACCESSORIES:

Select Mount Plate for New Construction: **GL-MP4U**

