**SPECIFICATIONS:**

Aluminum Profile with Frosted Diffuser

Drywall Channel Lighting System

Length: 39.37" / 1000mm

Overall Width With Flange: 3" / 76.2mm

Overall Channel Width: 1.5" / 38.1mm

Inside Width: 1.13" / 28.6mm

Depth: 0.63" / 16mm

Application: Suitable for up to two widths of 12mm LED Ribbon

Included: 1 x Feed End Cap

1 x Solid End Cap

1 x Diffuser Lens

2 x Seamless Connection Bars

8 x Seamless Connection Bar Screws

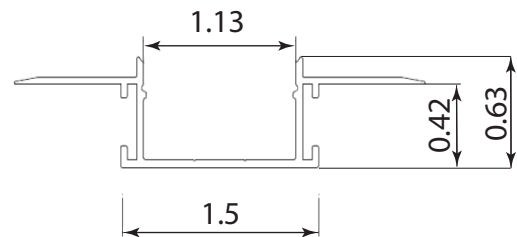
PRODUCT BENEFITS:

Frosted diffuser (lens) reduces the appearance of LED dots on ribbon. Can use up to two runs of 12mm LED Ribbon.

Frosted diffuser (lens) installs from top of channel snapping into place making install easy especially in tight spaces.

Creates a finished seamless look.

Driver needs to be remotely located.

PRODUCT DIMENSIONS:



DRYWALL CHANNEL LIGHTING SYSTEM

PART NUMBER: GL-DW01-1M

RECOMMENDED COMPATIBLE PRODUCTS:

High Density 12V LED Ribbon

GLF-HD-12V-30K-V2

GLF-HD-12V-40K

Regular Density 12V LED Ribbon

GLF-RD-12V-30K-V2

Colour Changing 12V LED Ribbon

GLF-RGB-12V

GLF-RGB-CONT (Colour Controller)