




INTEGRATED LED DOWNLIGHT
PART NUMBER: GL-14D4-DS-3036

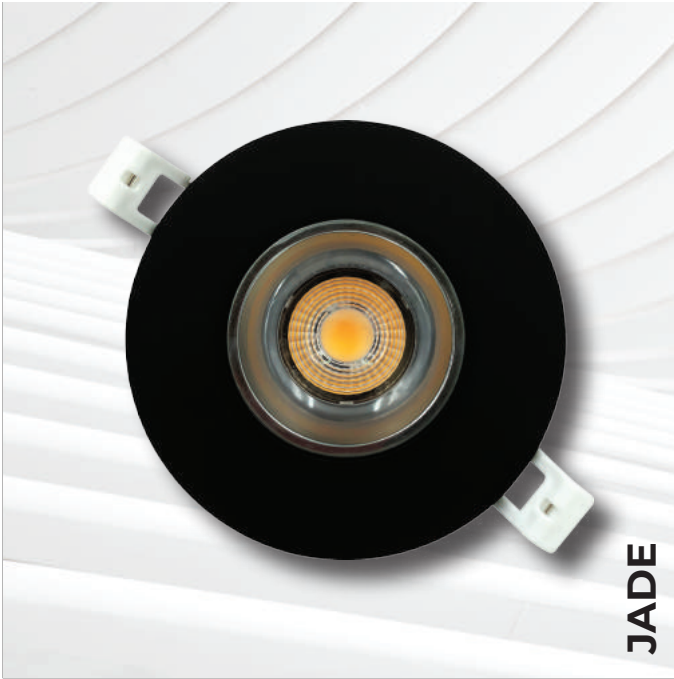

SPECIFICATIONS:

- Light Output: 1350 Lumens ± 10%
- Power: 14 Watts
- Efficacy (Lumens per Watt): 96.4 LM/W
- Colour Accuracy (CRI): 80+
- Light Colour: 3000K Warm White
- LED Chip Epistar
- Trim Size: 4" (Actual: 4.75"/121mm)
- Beam Angle: 36°
- Gimbal Angle: 0°
- Dimmable
- IC Rated
- Damp Location Rated
- 50,000 Life Hours
- Power Supply (Driver) Included

| LIGHTING FACTS | | INTEGRATED LED DOWNLIGHT |
|---|------------------------|---------------------------------|
| ITEM NO. | GL-14D4-DS-3036 | |
| Light Output (Lumens) | 1350 | |
| Watts | 14 | |
| Lumens per Watt (Efficacy) | 96.4 | |
| Colour Accuracy | 80+ | |
| Colour Rendering Index (CRI) | | |
| Light Colour | 3000K Warm White | |
| | | |
| 2700K 3000K 3500K 4000K 4500K 5000K 6000K | | |
| 14 Watt • Warm White | | |

| PHOTOMETRICS: | | | |
|-----------------------|-------------------------------|-----------------------------|-------------------------|
| MOUNTING HEIGHT (FT.) | CENTER BEAM FOOT CANDLES (FC) | EDGE BEAM FOOT CANDLES (FC) | BEAM AREA COVERED (FT.) |
| 4 FT. | 140.0 FC | 59.0 FC | 2'-7" |
| 6 FT. | 64.0 FC | 34.0 FC | 3'-11" |
| 8 FT. | 35.0 FC | 15.0 FC | 5'-2" |
| 10 FT. | 25.0 FC | 11.0 FC | 6'-6" |
| 12 FT. | 17.0 FC | 7.0 FC | 7'-10" |
| 14 FT. | 13.0 FC | 6.0 FC | 9'-1" |
| 16 FT. | 10.0 FC | 4.0 FC | 10'-5" |
| 18 FT. | 8.0 FC | 3.0 FC | 11'-8" |





INTEGRATED LED DOWNLIGHT

PART NUMBER: GL-14D4-DS-3036

ORDERING INFORMATION:

1. Select Reflector Colour:


GL-14D4-DS-3036-

- CL** - Clear Specular (Chrome)
- BK** - Black Specular


2. Select Trim Colour:

GL-4TR-DS-

- WH** - Matte White
- BK** - Matte Black

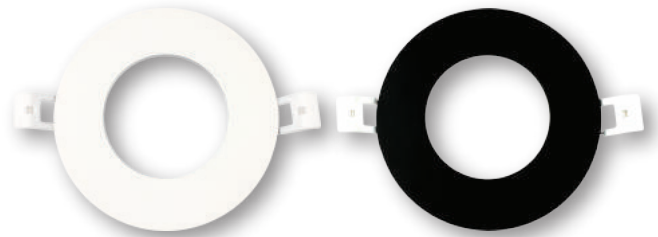

PRODUCT DIMENSIONS:

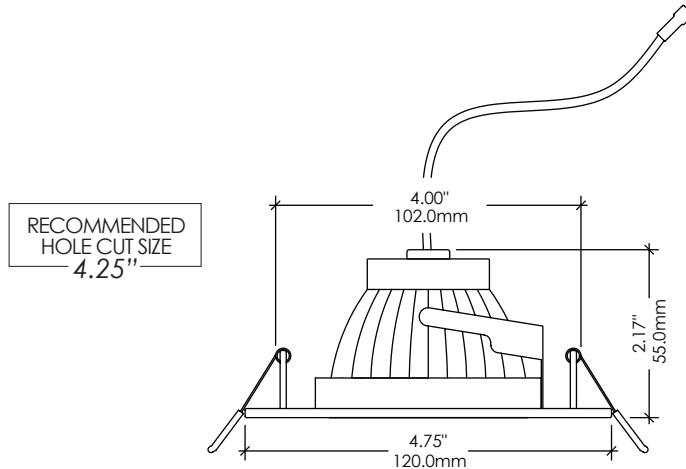

Power Supply (Driver) Size:
4-1/8" x 2-1/2" x 1-1/2"
(105mm x 64mm x 38mm)

ACCESSORIES:

Select Mount Plate for New Construction: **GL-MP4U**

